



# Outside Air Kit

sku# 99200139

## Compatibility:

• All Lopi Wood Stoves

• Deerfield Pellet Stove

• Foxfire Pellet Stove

## Packing List:





- Outside Air Duct Assembly
- Hood (includes rodent screen)
- Flashing
- 3" Duct (4' long)
- (2) Hose Clamps
- (2) 1" Wood Screws
- (2) #8 Screws (for securing air duct assembly to stoves with legs).
- (2) 1-1/2" Wood Screws
- (2) Drywall Anchors (for securing the hood and flashing)
- Answer Cover Plate and Gasket

## Cover Plate (ANSWER ONLY)

When using outside air with the Answer stove, a replacement cover plate is required to ensure combustion air is drawn from below.

### Cover Plate Replacement

- Remove the bridge plate – Remove the (2) screws that secure the bridge plate to the air control plate (set aside for reinstallation). Remove the air control plate and gasket – Remove the (2) screws that secure the air control plate to the air control.
- Discard the stock air control plate and gasket.
- Install the replacement air control plate and gasket – secure the plate and gasket to the air control using the (2) screws removed in step (a). Reinstall the bridge plate and secure using the screws removed in step (a).

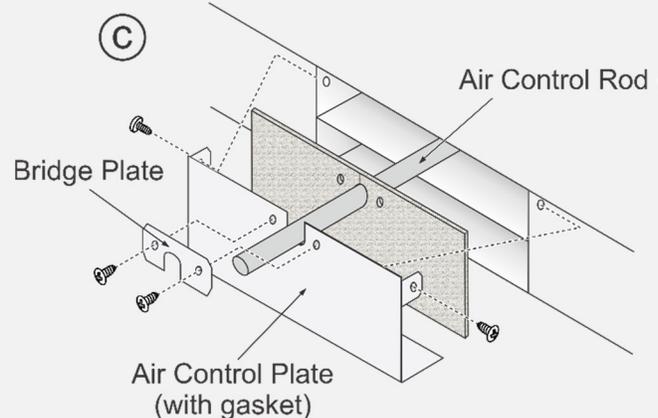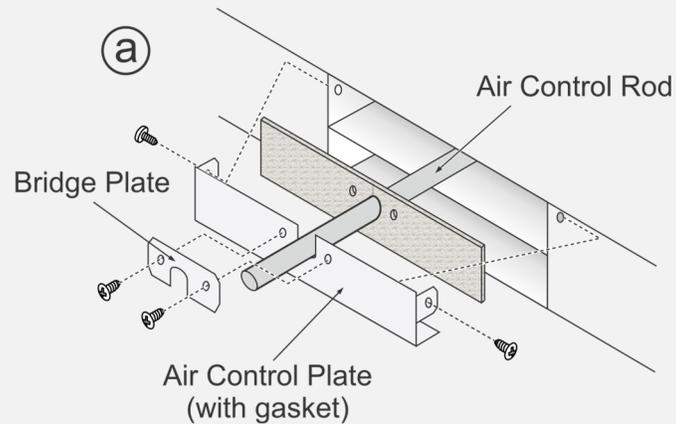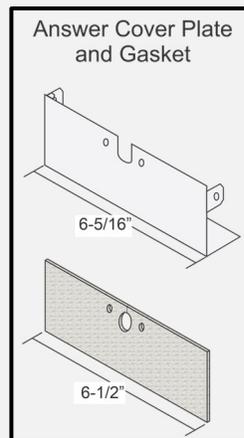




# Outside Air Kit


sku# 99200139

## Outside Air Knock-Out (ANSWER ONLY)

Remove the forward knock-out on the bottom of the stove.

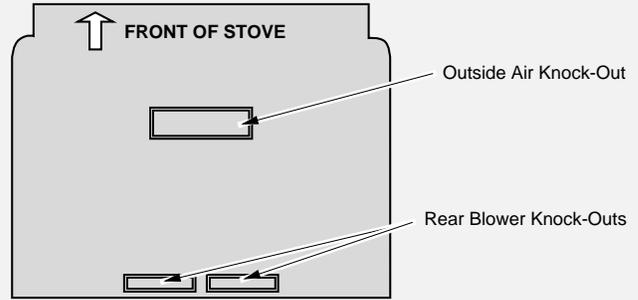

## Installation

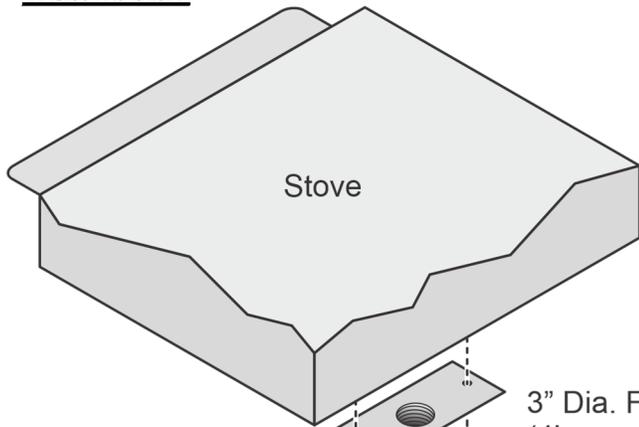


Seal the area around the tube to prevent air from entering through the wall.

**NOTE:** If the wall is thicker than 8", attach the flex duct to the hood, then slide the hood into place.

**(c)** Secure the flex duct to the air duct assembly using the included hose clamp. Attach the air duct assembly to the stove with the (2) included #8 screws

**(b)**

Slide the cover plate over the flex duct, then attach the flex duct to the hood with the included hose clamp. Secure the cover plate to the wall with the included screws (and drywall anchors if needed).  
**HINT:** The flex must be fully stretched with the ends cut square and flattened for it to fit properly. The tube on the hood and air duct may be crimped if necessary

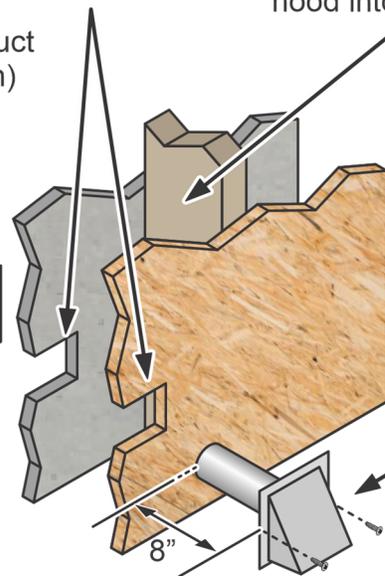

**(a)**

Slide the hood through the wall and secure it to the outside wall with the (2) included screws.

Hood with Rodent Screen

**Endeavor, Liberty, Evergreen, Rockport & Cape Cod**

Use the included hose clamp to secure the flex duct to the 3" air inlet collar at the bottom rear of the appliance